

STUDIO

CANYON  
PERSUASION  
PHOENIX  
VIBE



THE  
SYMPHONY  
COLLECTION™

**NEW AND  
IMPROVED**

28 New Colors


16P Phthalate Free

Improved Durability

*Abrasion Resistance now 250,000 Double Rubs*

**Resilience<sup>SR</sup>**  
ENDURING PROTECTION


# PERSUASION

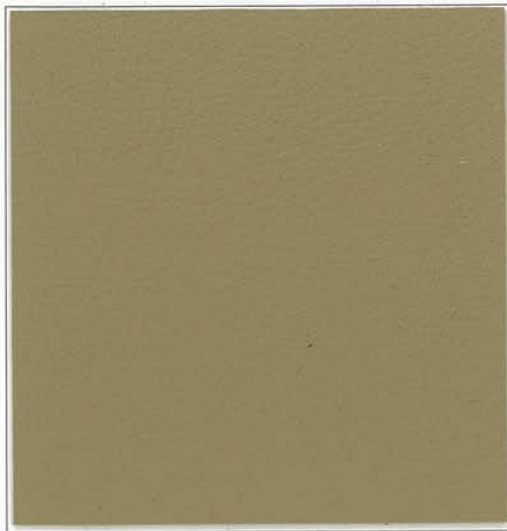


Mink  
TPE-105



Chiffon  
TPE-009




Bisque  
TPE-005




Sand  
TPE-022



Limon  
TPE-104



Maize  
TPE-016



Butterscotch  
TPE-007



Curry  
TPE-012




Badger  
TPE-101



Café  
TPE-008



Otter  
TPE-106



Pumpernickel  
TPE-021



Tigerlily  
TPE-109



China Red  
TPE-010



Matador  
TPE-017



Beet  
TPE-004




Aubergine  
TPE-002



Concrete  
TPE-102



Citronella  
TPE-011



Peapod  
TPE-107




Jalapeno  
TPE-015



Iron  
TPE-014



Sky Dive  
TPE-108



Cortez  
TPE-103



Meridian  
TPE-018



Blueberry  
TPE-006



Onyx  
TPE-019



# CANYON




# PHOENIX





# VIBE

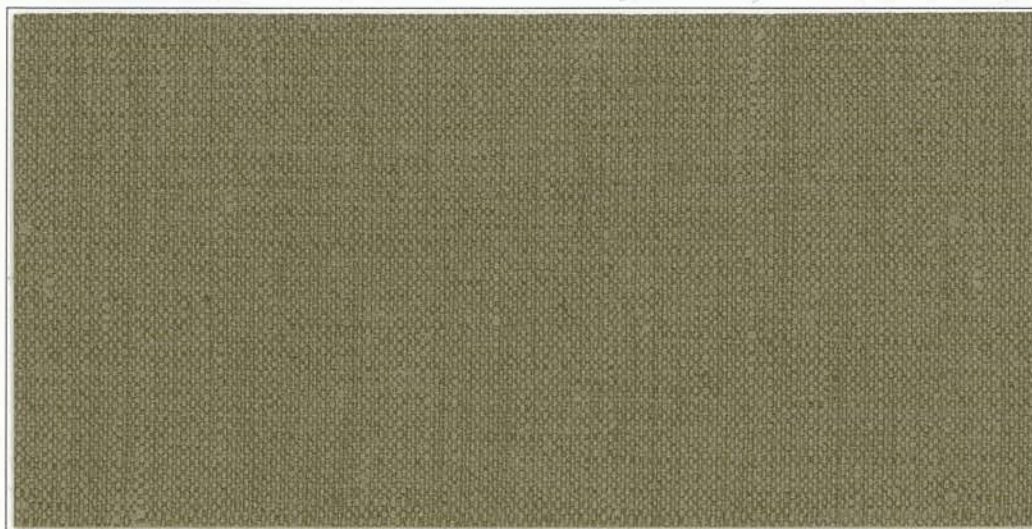

Hammock  
TVI-104



Irish Linen  
TVI-014



Mushroom  
TVI-015



Flax  
TVI-011



Cornsilk  
TVI-010



Kernel  
TVI-105



Alchemy  
TVI-001



Yukon  
TVI-109



Clementine  
TVI-007



Sunset  
TVI-017



Indian Summer  
TVI-013



Sorbet  
TVI-108



Grapevine  
TVI-103



Lime  
TVI-106



Grasshopper  
TVI-012



Clover  
TVI-008



Cornerstone  
TVI-102



Cocoa  
TVI-009



Mermaid  
TVI-107



Bombay Blue  
TVI-004



Ball Point  
TVI-002



Cityscape  
TVI-006



Anchor  
TVI-101

# STUDIO – CANYON PERSUASION PHOENIX VIBE

APPLICATIONS Hospitality, Healthcare, Contract, Education, Automotive & RV, Residential

## GENERAL SPECIFICATIONS

**Width** 54"  
**Roll Size** 30 Yards  
**Weight** 28 Ounces per Linear Yard  
**Composition** Surface: 100% Phthalate Free PVC  
Backing: 100% Brushed Polyester Knit

## PERFORMANCE SPECIFICATIONS

**Abrasion Resistance** 250,000+ Double Rubs ASTM D 4157-13 Wyzenbeek / CFFA-1A  
**Anti Microbial/Mildew Resistant** Pass ASTM G21-09 / CFFA-120  
**Anti Microbial** Pass AATCC 147 / CFFA-300  
**Colorfastness to Light** 650 Hours per AATCC Test Method 16-2012, Option 3 / CFFA-2 (Xenon-Arc)  
**Cold Crack** -20° F per Federal Standard No. 191A-TM5874 / CFFA-6  
**Stain Resistant** with Resilience<sup>SR</sup> Protection  
**Sulfide Stain Resistant**

## FLAMMABILITY REQUIREMENTS \*

California Fire Code Technical Bulletin No. 117, 2013  
BIFMA Section 3 & 4  
UFAC Class 1  
MVSS 302  
NFPA 260  
IMO 2010 FTP Code-MSV 88/26/Add.2 Part 8(3.1 & 3.2)

## REDUCED ENVIRONMENTAL IMPACT

16P Phthalate Free (includes all Phthalates listed in CAL PROP 65 and CPSIA)  
Lead Free  
BPA Free / Tris Free / Formaldehyde Free  
Does not contain Conflict Minerals

